


REVISION HISTORY		
REV	DESCRIPTION	DATE
1.0	First release	Jul.21/2023

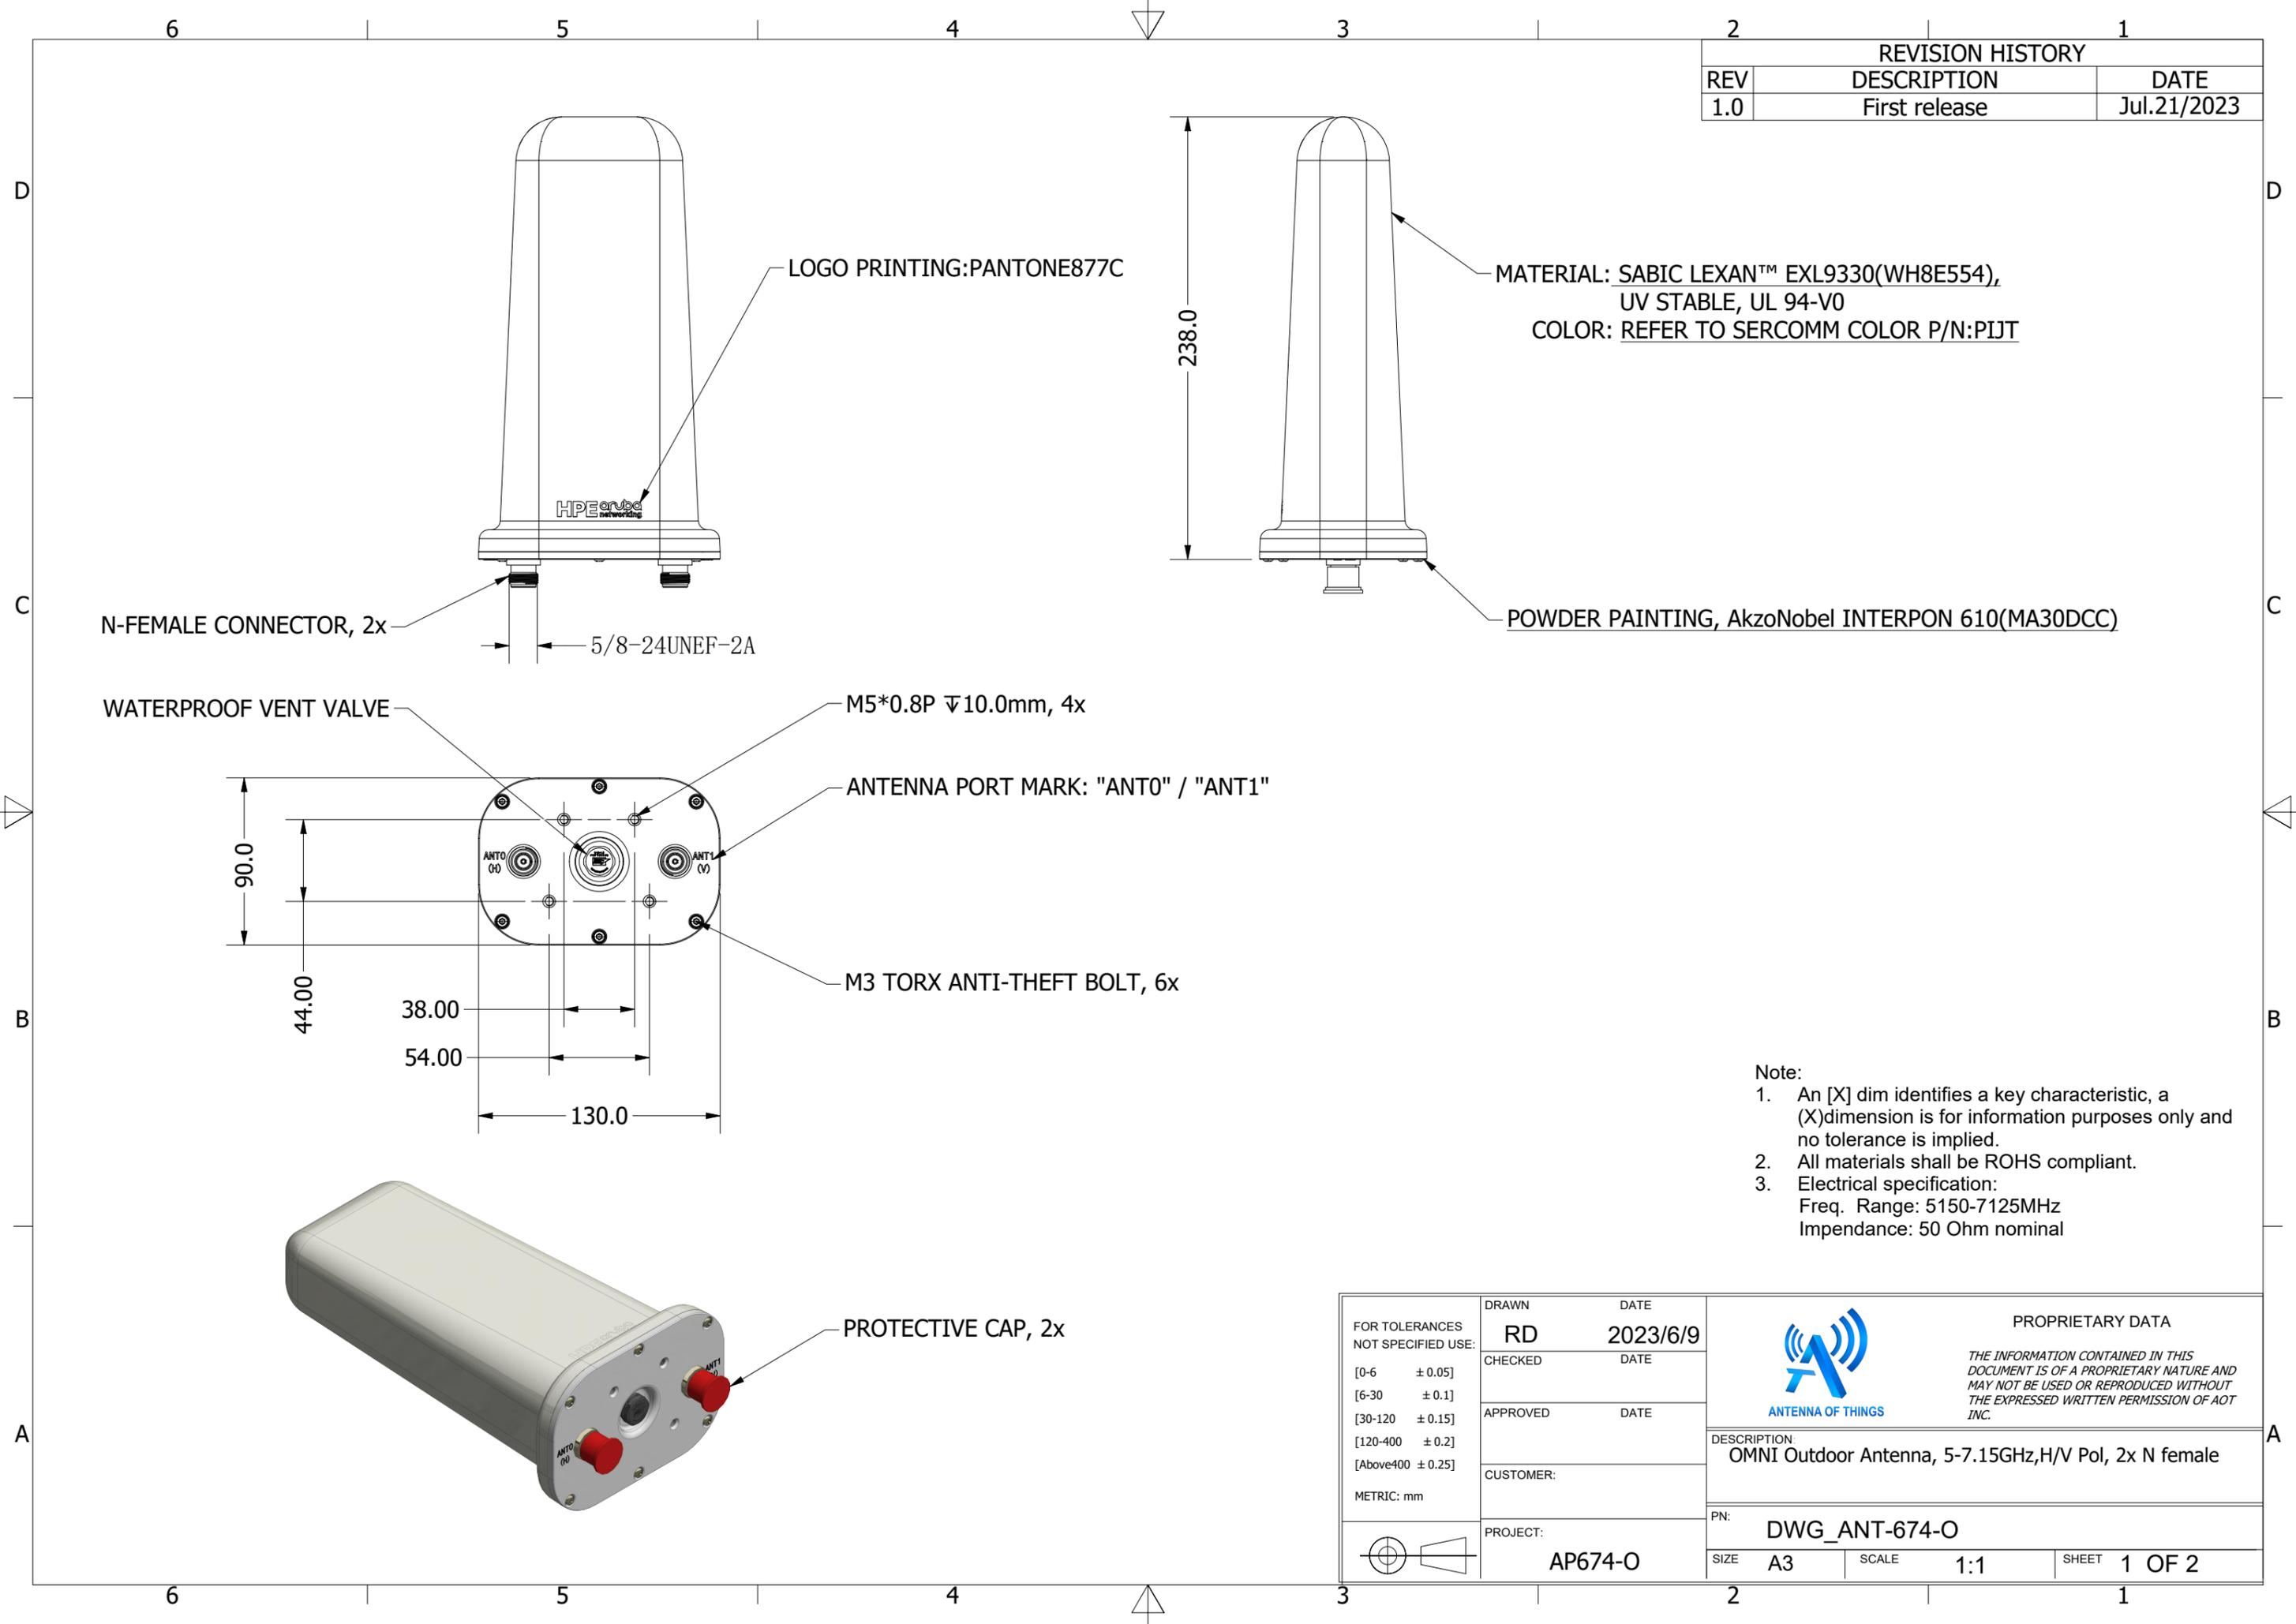

LOGO PRINTING:PANTONE877C

MATERIAL: SABIC LEXAN™ EXL9330(WH8E554),
UV STABLE, UL 94-V0
COLOR: REFER TO SERCOMM COLOR P/N:PIJT

POWDER PAINTING, AkzoNobel INTERPON 610(MA30DCC)

N-FEMALE CONNECTOR, 2x


5/8-24UNEF-2A

WATERPROOF VENT VALVE

M5*0.8P ∇10.0mm, 4x

ANTENNA PORT MARK: "ANT0" / "ANT1"

M3 TORX ANTI-THEFT BOLT, 6x

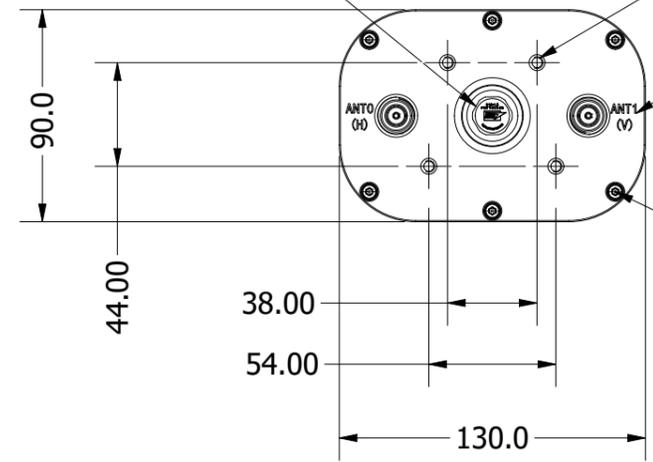

- Note:
1. An [X] dim identifies a key characteristic, a (X)dimension is for information purposes only and no tolerance is implied.
 2. All materials shall be ROHS compliant.
 3. Electrical specification:
Freq. Range: 5150-7125MHz
Impedance: 50 Ohm nominal

PROTECTIVE CAP, 2x



FOR TOLERANCES NOT SPECIFIED USE: [0-6 ± 0.05] [6-30 ± 0.1] [30-120 ± 0.15] [120-400 ± 0.2] [Above400 ± 0.25] METRIC: mm	DRAWN: RD CHECKED:	DATE: 2023/6/9 DATE:	 PROPRIETARY DATA THE INFORMATION CONTAINED IN THIS DOCUMENT IS OF A PROPRIETARY NATURE AND MAY NOT BE USED OR REPRODUCED WITHOUT THE EXPRESSED WRITTEN PERMISSION OF AOT INC.
	APPROVED:	DATE:	
	CUSTOMER:	DESCRIPTION: OMNI Outdoor Antenna, 5-7.15GHz,H/V Pol, 2x N female	
	PROJECT: AP674-O	PN: DWG_ANT-674-O	SIZE: A3 SCALE: 1:1